




ALUMINUM SINGLE DOOR - TYPE 4X ENCLOSURES - LESS PANEL



NOTE: MAXIMUM SPACING BETWEEN DOOR CLAMPS IS 15.00 INCHES

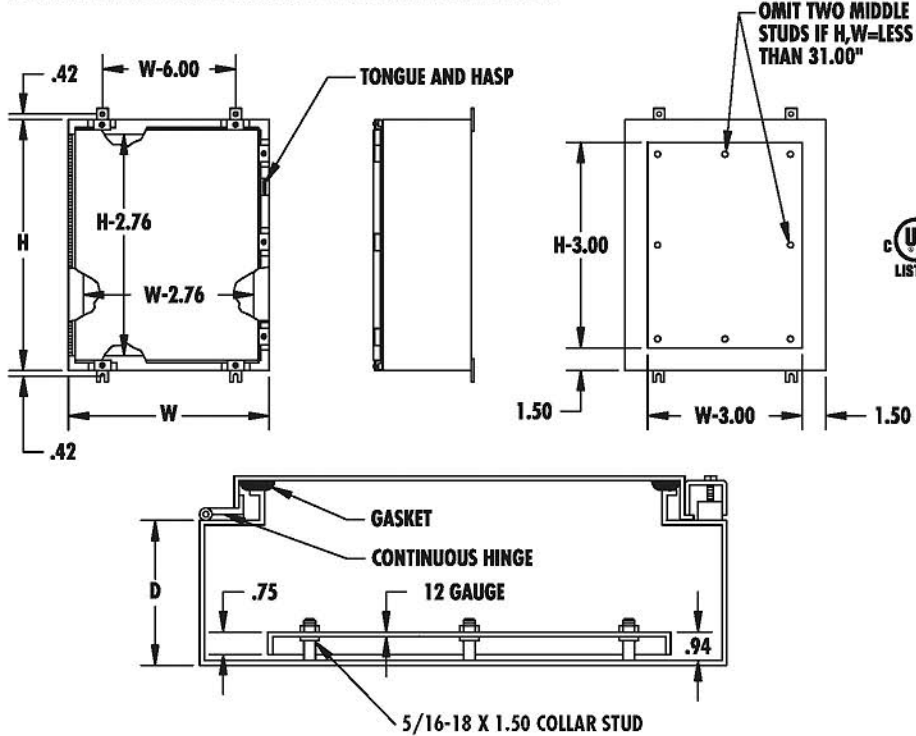

- CONSTRUCTION:**
- TYPE 5052 H-32.080 ALUMINUM
 - SEAMS CONTINUOUSLY WELDED AND GROUND SMOOTH
 - STAINLESS STEEL SCREWS AND CLAMPS ON THREE SIDES OF COVER ASSURE WATERTIGHT SEAL
 - ALUMINUM CONTINUOUS HINGE.
 - OIL RESISTANT GASKET
 - TONGUE AND HASP FOR PAD LOCKING
 - STUDS PROVIDED FOR MOUNTING OPTIONAL PANEL
 - ALSO MEETS INDUSTRY STANDARDS FOR TYPE 12 USE

- FINISH:**
- ENCLOSURES HAVE A BRUSHED FINISH

TYPE 4X

ALUMINUM SINGLE DOOR-CONTINUOUS HINGE TYPE 4X ENCLOSURES STEEL PANEL (WHITE)

Enclosure Size HxWxD	Catalog Number	Weight	Number of Clamps	Catalog Number	Weight
16x12x6	A16126N4X	9	4	1612P	4
20x16x6	A20166N4X	13	4	2016P	9
20x20x6	A20206N4X	16	4	2020P	10
24x20x6	A24206N4X	18	5	2420P	13
24x24x8	A24248N4X	22	5	2424P	15
30x24x8	A30248N4X	26	5	3024P	19
36x24x8	A36248N4X	29	5	3624P	24
36x30x8	A36308N4X	38	7	3630P	30
48x36x8	A48368N4X	56	8	4836P	49
20x16x10	A201610N4X	16	4	2016P	9
24x20x10	A242010N4X	22	5	2420P	13
30x24x12	A302412N4X	32	5	3024P	19
36x30x12	A363012N4X	44	7	3630P	30
60x36x12	A603612N4X	76	9	6036P	61

NOTE: FOR QUICK RELEASE LATCHES SEE ACCESSORIES SECTION

NOTE: FOR ALUMINUM PANELS SEE ACCESSORIES SECTION

FOR LARGE QUANTITIES CALL FACTORY